



rocket[™] ac

Powerful airMAX[®] ac BaseStation

Model: R5AC-Lite

airMAX ac Technology for up to 450+ Mbps Throughput

Superior Processing by airMAX Engine with Custom IC

Plug and Play Integration with RocketDish Antennas



Overview

Ubiquiti Networks® has designed the first airMAX® ac radio with high quality, high performance, and ease of installation in mind.

The Rocket™ 5ac Lite is ideal for deployment in Point-to-Point (PtP) applications requiring maximum performance. Point-to-MultiPoint (PtMP) functionality will be added via a future firmware upgrade.

You have the freedom to locate, deploy, and operate the Rocket5ac Lite anywhere in the world. It allows for a high degree of flexibility in configuring channel bandwidths: 20, 40, 50, 60, and/or 80 MHz, depending on local country regulations.

The Rocket5ac Lite radio can be paired with a RocketDish™ antenna to create the endpoint of a high-performance, Point-to-Point (PtP) backhaul.

Software

airOS®

Sporting an all-new design for improved usability, airOS® v7 is the revolutionary operating system for Ubiquiti airMAX ac products.

Powerful Wireless Features


- airMAX ac Protocol Support
- Long-Range Point-to-Point (PtP) Link Mode
- Selectable Channel Width: 20/40/50/60/80 MHz*
- Automatic Channel Selection
- Transmit Power Control: Automatic/Manual
- Automatic Distance Selection (ACK Timing)
- Strongest WPA2 Security

* Channel selection varies by product model.


Usability Enhancements

- Dynamic Configuration Changes
- Instant Input Validation
- HTML5 Technology
- Optimization for Mobile Devices
- Detailed Device Statistics
- Comprehensive Array of Diagnostic Tools, including Ethernet Cabling Test, RF Diagnostics, and airView® Spectrum Analyzer

Point-to-Point (PtP) Bridging Example

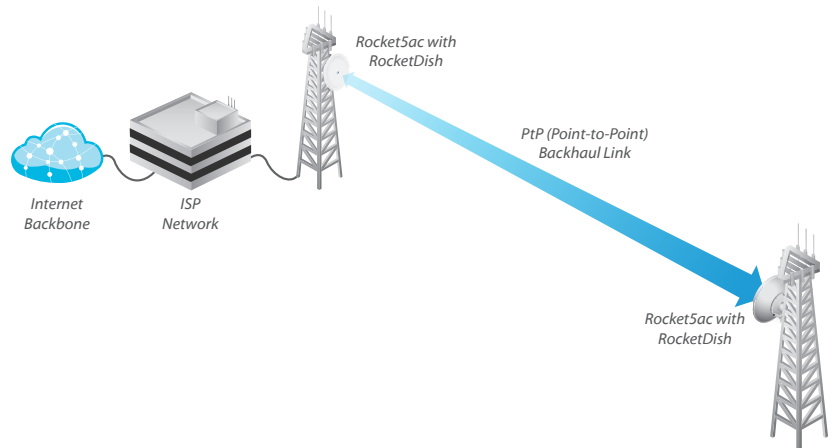

The Rocket R5AC-Lite radios paired with the RocketDish RD-5G31-AC antennas create a powerful PtP backhaul link.

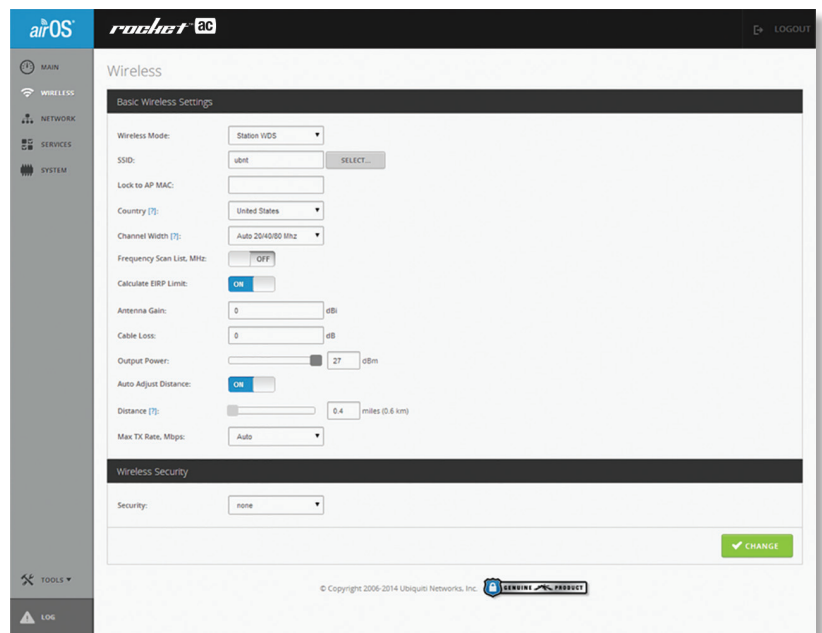

airMAX Technology Included

Unlike standard Wi-Fi protocol, Ubiquiti's Time Division Multiple Access (TDMA) airMAX protocol allows each client to send and receive data using pre-designated time slots scheduled by an intelligent AP controller.

This time slot method eliminates hidden node collisions and maximizes airtime efficiency, so airMAX technology provides performance improvements in latency, noise immunity, scalability, and throughput compared to other outdoor systems in its class.

Intelligent QoS Priority assigned to voice/video for seamless streaming.

Scalability High capacity and scalability.

Long Distance Capable of high-speed, carrier-class links.

Superior Performance

The next-generation airMAX ac technology boosts the advantages of our proprietary TDMA protocol.

Ubiquiti's airMAX engine with custom IC dramatically improves TDMA latency and network scalability. The custom silicon provides hardware acceleration capabilities to the airMAX scheduler, to support the high data rates and dense modulation used in airMAX ac technology.




Throughput Breakthrough

airMAX ac supports high data rates, which require dense modulation: 256QAM – a significant increase from 64QAM, which is used in airMAX.


With their use of proprietary airMAX ac technology, airMAX ac products supports up to 450+ Mbps real TCP/IP throughput – up to triple the throughput of standard airMAX products.

airMAX TDMA Technology

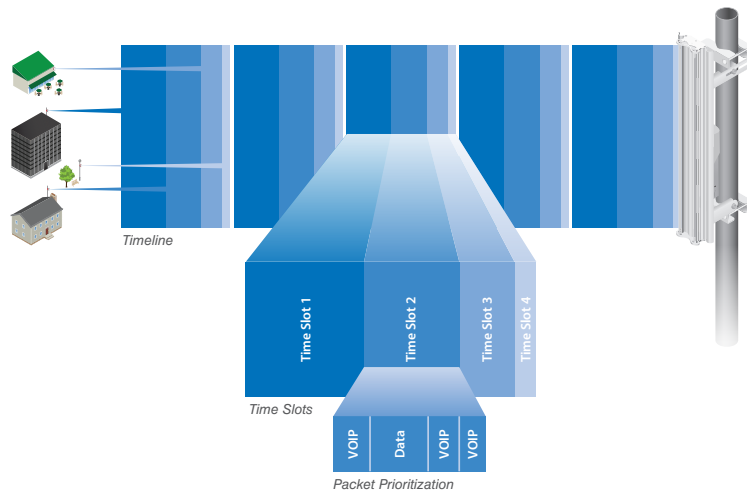

Up to 100 airMAX stations can be connected to an airMAX Sector; four airMAX stations are shown to illustrate the general concept.


Improved Latency and Noise Immunity

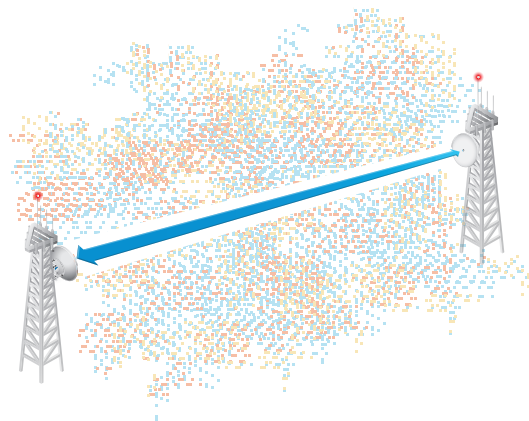

airMAX Network Scalability



Superior Throughput Performance

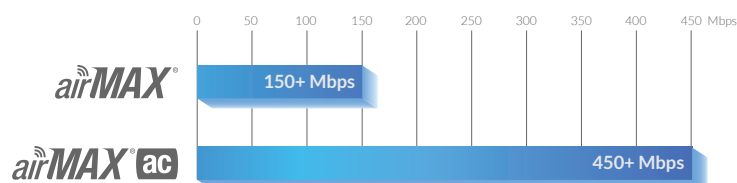

Specifications

R5AC-Lite Physical / Electrical / Environmental Information

| | |
|---------------------------|--|
| Dimensions | 162 x 84 x 37 mm (6.38 x 3.31 x 1.46") |
| Weight | 250 g (8.81 oz) |
| Enclosure Characteristics | Outdoor UV Stabilized Plastic |
| Processor | MIPS 74Kc |
| Memory | 128 MB DDR2 SDRAM, 16 MB NOR FLASH |
| Networking Interface | (1) 10/100/1000 Mbps |
| RF Connections | (2) RP-SMA (Waterproof) |
| LEDs | Power, Ethernet, (4) Signal Strength |
| Max. Power Consumption | 8.5W |
| Power Supply | 24V, 0.5A Gigabit PoE Adapter |
| Power Method | Passive PoE (Pairs 4, 5+; 7, 8 Return) |
| ESD/EMP Protection | ± 24KV Air / Contact |
| Operating Temperature | -40 to 80° C (-40 to 176° F) |
| Operating Humidity | 5 to 95% Noncondensing |
| Shock and Vibration | ETSI300-019-1.4 |

R5AC-Lite Software Information

| | |
|----------------------------|---|
| Modes | Access Point, Station |
| Services | Web Server, SNMP, SSH Server, Telnet , Ping Watchdog, DHCP, NAT, Bridging, Routing |
| Utilities | Antenna Alignment Tool, Discovery Utility, Site Survey, Ping, Traceroute, Speed Test |
| Distance Adjustment | Dynamic Ack and Ackless Mode |
| Power Adjustment | Software Adjustable UI or CLI |
| Security | WPA2 AES Only |
| QoS | Supports Packet Level Classification WMM and User Customer Level: High/Medium/Low |
| Statistical Reporting | Up Time, Packet Errors, Data Rates, Wireless Distance, Ethernet Link Rate |
| Other | Remote Reset Support, Software Enabled/Disabled, VLAN Support, 256QAM, 20/40/50/60/80 MHz Channel Width Support |
| Ubiquiti Specific Features | 50 MHz Channels, airMAX Mode, Traffic Shaping with Burst Support, Discovery Protocol, Frequency Band Offset, Ackless Mode |

R5AC-Lite Compliance

| | |
|--------------------|-------------|
| Wireless Approvals | FCC, IC, CE |
| RoHS Compliance | Yes |

R5AC-Lite Operating Frequency

| R5AC-Lite Operating Frequency | | | | | | | |
|-------------------------------|-----------------|---------|-----------|--|-----------------|-------------|-----------|
| Operating Frequency | | | | Worldwide: 5150 - 5875 MHz USA: 5725 - 5850 MHz | | | |
| Output Power | | | | 27 dBm | | | |
| TX Power Specifications | | | | RX Power Specifications | | | |
| Modulation | Data Rate | Avg. TX | Tolerance | Modulation | Data Rate | Sensitivity | Tolerance |
| airMAX ac | 1x BPSK (1/2) | 27 dBm | ± 2 dB | airMAX ac | 1x BPSK (1/2) | -96 dBm | ± 2 dB |
| | 2x QPSK (1/2) | 27 dBm | ± 2 dB | | 2x QPSK (1/2) | -95 dBm | ± 2 dB |
| | 2x QPSK (3/4) | 27 dBm | ± 2 dB | | 2x QPSK (3/4) | -92 dBm | ± 2 dB |
| | 4x 16QAM (1/2) | 27 dBm | ± 2 dB | | 4x 16QAM (1/2) | -90 dBm | ± 2 dB |
| | 4x 16QAM (3/4) | 27 dBm | ± 2 dB | | 4x 16QAM (3/4) | -86 dBm | ± 2 dB |
| | 6x 64QAM (2/3) | 27 dBm | ± 2 dB | | 6x 64QAM (2/3) | -83 dBm | ± 2 dB |
| | 6x 64QAM (3/4) | 26 dBm | ± 2 dB | | 6x 64QAM (3/4) | -77 dBm | ± 2 dB |
| | 6x 64QAM (5/6) | 25 dBm | ± 2 dB | | 6x 64QAM (5/6) | -74 dBm | ± 2 dB |
| | 8x 256QAM (3/4) | 23 dBm | ± 2 dB | | 8x 256QAM (3/4) | -69 dBm | ± 2 dB |
| | 8x 256QAM (5/6) | 22 dBm | ± 2 dB | | 8x 256QAM (5/6) | -65 dBm | ± 2 dB |



Plug and Play Integration

Rocket radios and airMAX antennas have been designed to seamlessly work together. Every RocketDish™ antenna has a built-in Rocket mount, so installation requires no special tools.

The Rocket5ac Lite is compatible with the following RocketDish antennas:

- RD-5G31-AC
- RD-5G30
- RD-5G34

